


MAX. PLATE WIDTH: 425mm (16.7in) MAX. OPERATING WEIGHT: 135kg (298lb)

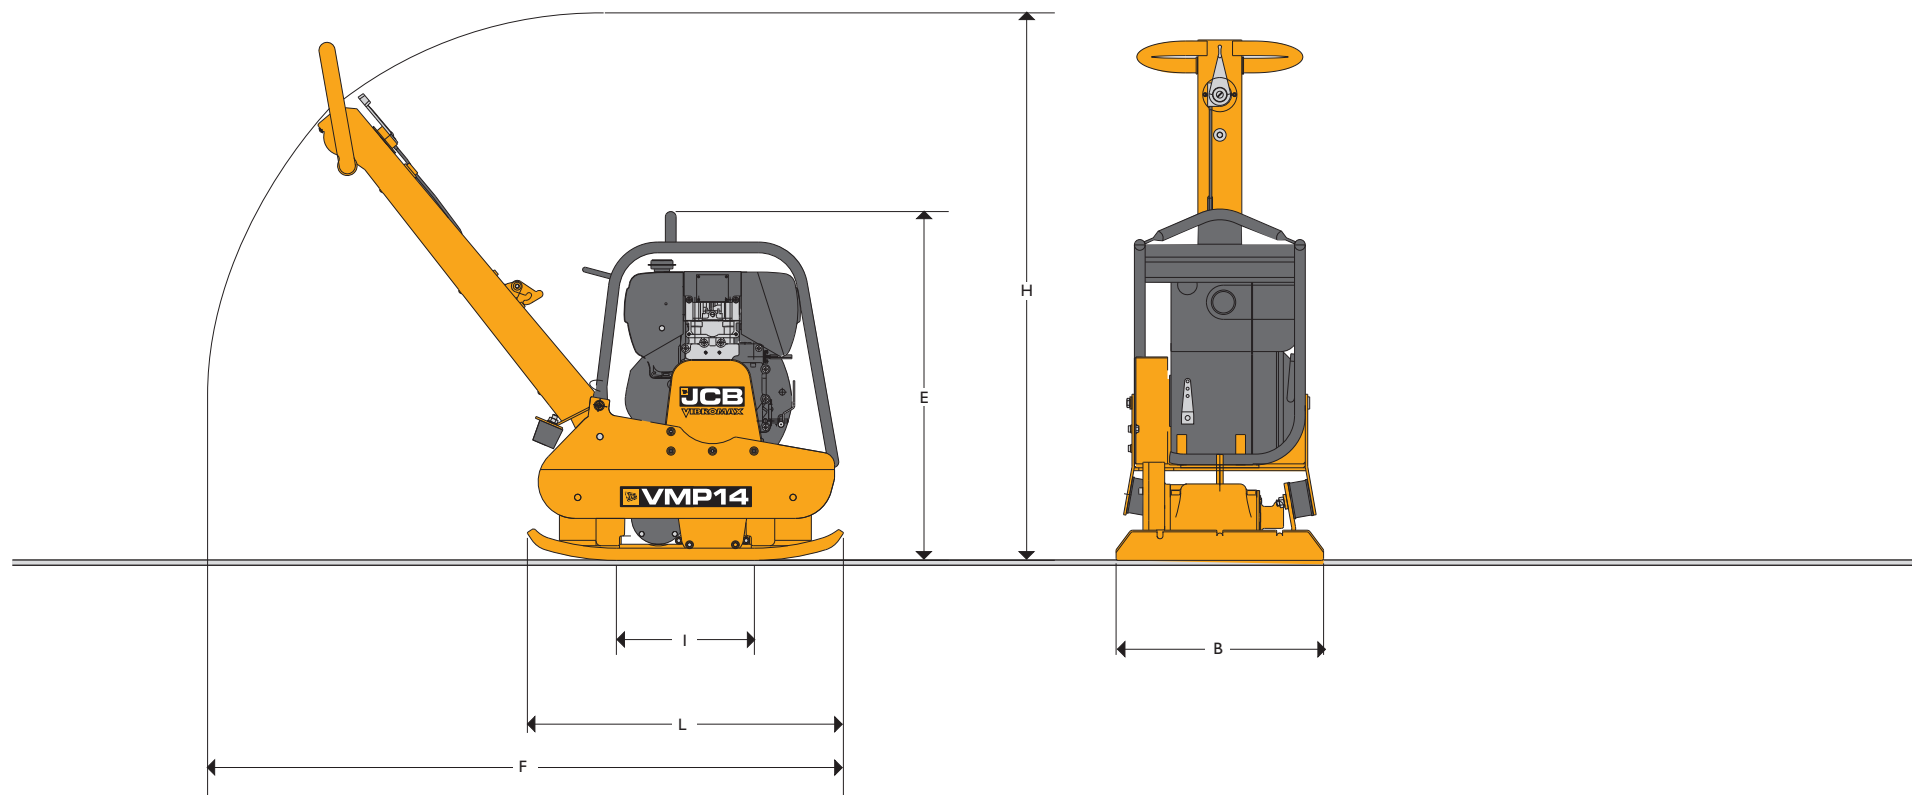

STATIC DIMENSIONS

Dimensions in millimetres (in)	
B Overall width	425 (16.7)
E Height without guide bar	670 (26.3)
F Total length	1400 (55.1)
H Total clearance	1100 (43.3)
I Contact length	390 (15.4)
L Plate length	650 (25.6)

OPERATING DATA

Exciter frequency	Hz (rpm)	80 (4800)
Working width*	cm (in)	42.5 (16.7)
Centrifugal force	kN (lbf)	25 (5620)
Operating weight	kg (lb)	135 (298)
Contact area	cm ² (in ²)	1211 (188)
Centrifugal force / contact area	N/cm ² (lbf/in ²)	20.6 (29.9)
Compaction depth up to	cm (in)	40 (15.7)
Working speed forward / reverse max.	m/min (ft/min)	20 (65.6)
Compacted area up to	m ² /h (ft ² /h)	510 (5488)

* Other working widths on request.

ENGINE

Single cylinder, air-cooled four-stroke diesel engine.

Make		HATZ
Model		I B 20
Piston displacement	cm ³ (in ³)	232 (14.2)
Performance – DIN 6271	kW (hp)	3.1 (4.2)
Operating speed @ rpm	min ⁻¹	2950
Starting device		Recoil starter
Air cleaner		Dry air cleaner
Fuel filter		Cartridge

SERVICE CAPACITIES

Fuel	litres (US gal)	3.2 (0.8)
Engine oil (engine)	litres (US gal)	0.9 (0.2)
Engine oil (exciter)	litres (US qt)	0.3 (0.32)

PROPULSION

See exciter drive.

EXCITER DRIVE

Centrifugal clutch and V-belt drive.

EXCITER

Twin shaft directional force exciter with active direction infinitely adjustable.



JCB Light Equipment, World Parts Centre, Waterloo Park, Beamhurst, Uttoxeter, Staffordshire, United Kingdom, ST14 5PA.
 Tel +44 (0)1889 506030, Fax +44 (0)1889 506046, Email: lightequipmentsales@jcb.com, Web: <http://www.jcblightequipment.com>

JCB reserves the right to change specifications without notice. Illustrations shown may include optional equipment and accessories. The JCB logo is a registered trademark of J C Bamford Excavators Ltd.



9999/5132 06/10 Issue 3